

Call us for more information: 1-800-952-3257



Bagmaster™ Bag Opening and Feeding Machine

This extensive line of **bag opening and feeding machines** is designed for a wide variety of applications using cartridge and specialty bags. The cost efficient, high speed design of the Bagmaster™ virtually eliminates manual bag handling and the need for skilled operators. A single untrained operator can achieve up to 30 bags per minute!

Your operator simply loads a cartridge, or loose bags, into the bag magazine of the Bagmaster™ which holds up to 250 bags at a time. An internal blower system automatically opens the top bag, holding it open for the operator.

Most **Bagmasters™** feature articulating product guides that shape the opening of the bag to the product being packaged. These guides turn a flimsy bag into a rigid container making it possible to get an incredibly tight fitting bag around the most difficult products.

- 400 Series (up to 15" wide)
- 400 Series (up to 25" wide)
- 500 Series
- FSR (for food processing applications)

Bagmaster™:

Company: Clamco

Machine type: Drop Sealers/Fill and Seal

Industries:

Electronics
 Food
 Manufacturing
 Publishing/Printing
 Wholesale Trade
 Retail



Clamco Bench Mounted Sealers for foods, retail products and industrial supplies. A model for every bag size up to 36"; a jaw for every bag material and a seal as strong as the bag itself. Greater durability and operation equal to more expensive methods of sealing.

- Heat indicator assists in proper temperature selection.
- Only one moving part for minimum wear and maximum service.
- Thermostat controls sealing temperature of upper & lower jaws for strong, watertight seal.
- Strong 1/4" seal matches bag strength; wide seal available.
- Red safety pilot light warns operator that jaws are hot; reminder to turn off machine at day end.
- Choice of jaws: Teflon®, plain metal, and serrated metal.
- Simple to maintain in the field.
- All electrical components easily replaced in minutes without special tools.
- All sealing jaw surfaces are heated evenly by durable heating cartridge. No hot or cold spots.




UNIQUE TECHNICAL SERVICES, INC.

Packaging Systems - Strap Sales - Strapping Machine Service

Call us for more information: 1-800-952-3257



This extensive line of bag opening and filling machines is designed for a wide variety of applications using cartridge and specialty bags. The cost efficient, high speed, virtually eliminates manual bag handling and the need for skilled operators. A single untrained operator can achieve up to 30 bags per minute! Your operator simply loads a cartridge, or loose bags, into the bag magazine of the Bagmaster™ which holds up to several hundred bags. An internal blower system automatically opens the top bag, holding it open for the operator. Most Bagmasters feature articulating product guides that shape the opening of the bag to the product being packaged. These guides turn a flimsy bag into a rigid container making it possible to get an incredibly tight fitting bag around the most difficult products. Automatic Drop Sealers are high production bag sealing machines built for single or multi-shift environments. Drop Sealer systems will pay for themselves several times a year by increasing production and reducing labor costs. These heavy-duty sealers are available in two model groups that can handle bags up to 25 inches wide with automatic trim sealing to meet your individual packaging needs.

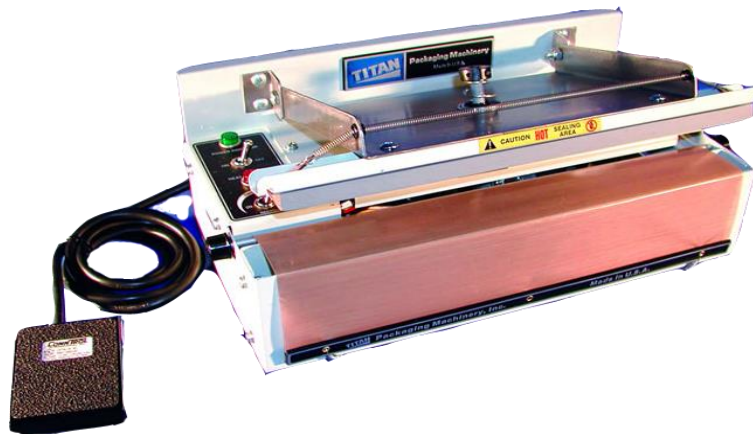

Electro-Sealer™ Constant Heat Sealer(available in the 312 or 318 model) ensures consistent heat seals polyethylene, anti-stat, and other thermoplastic materials up to 30-mil total thickness. Electro-sealers make air tight seals on almost any thermoplastic film through wrinkles, folds or gussets.

Available as a single 1/8" (3mm) wide bar sealer, as a single trim sealer, as a double 1/8" (3mm) bar sealer, or as a double sealer with a bar seal and trim seal.

- For uniform, strong, attractive seals, unit uses patented low voltage heated band with cover.
- Constantly heated aluminum jaw allows for sealing of toughest materials.
- Rapid warm-up takes only two minutes from turn-on.
- Portable unit can be operated by standing or seated operator.
- Easy to move, conveniently stored.
- Convenient foot switch gives single-cycle sealing or continuous-cycle sealing when kept depressed.

Some photos may show accessories not part of basic machine.

Specifications and design features subject to change without notice.



Call us for more information: 1-800-952-3257



An economical bag sealing solution for a low demand environment.

Ideal for: Shipping Departments, Offices, Mail Rooms, Retail Counters, Parts Departments, low volume Production Lines, Laboratories, Sample Rooms, and Medical Centers.

- Low cost, thrifty to use
- Lightweight, portable table model
- Fast impulse sealing of all type of plastic bags, including many laminates
- Seals thin as well as thick materials
- Just plug in and use, no warm-up needed
- No hot surfaces when not sealing
- Dependable time/temperature control
- Sturdy cast aluminum construction
- Band-type seal is liquid and air-tight
- Grounded 3-prong cord included as standard
- Teflon® covered sealing elements



Call us for more information: 1-800-952-3257



For air and watertight sealing of polyethylene bags used for packaging food, dry goods, hardware and miscellaneous manufactured products.

- For uniform, strong, attractive seals, unit uses patented low voltage heated band with Teflon® cover.
- When new Teflon® is needed it is easily replenished from reserve supply.
- Rapid warm-up takes only two minutes from turn-on.
- Portable unit can be operated by standing or seated operator.
- Easy to move, conveniently stored.
- Convenient foot switch gives single-cycle sealing or continuous-cycle sealing when kept depressed.



UNIQUE TECHNICAL SERVICES, INC.

Packaging Systems - Strap Sales - Strapping Machine Service

Call us for more information: 1-800-952-3257



For hosiery, undergarments, knit goods, greeting cards, sporting gear and snack foods, motorized foot-pedal sealers for polyethylene and polypropylene bags. Seals, trims comparable to side weld seam.

- Adjustable power control for fast selection of best sealing element temperature for polyethylene or polypropylene bags up to 2 mil thickness.
- Long lasting sealing element makes bead seal comparable to side weld seam; trims off excess.
- Handy connection for plant air or small compressor.
- Efficient air jet blows away scrap after bag is sealed and trimmed.



- Impulse type sealing arms are electromagnetically activated with foot pedal switch.
- Heat is applied by both upper and lower sealing bars for a positive liquid and airtight seal.
- No preheating is required. Both sealing bars are cool when not in use.
- The seal width is approximately one-eighth inch.
- An audible time-temperature cycle indicator is included on all standard units.
The audible indicator is not provided on units with optional dwell control.
- The time-temperature cycle is precisely controlled by a solid state electronic timer.
- Timer is adjustable from a fraction of a second to five seconds for sealing a wide variety of materials.
- On heavy films, the operator can allow more time for a seal to set, after completion of the sealing cycle, by keeping the foot pedal depressed.
- Teflon® covering prevents film from adhering to sealing bars during cycle.



The Audion Super Poly is a hand held impulse sealer designed to be used at the location of the item that needs to be sealed and comes with a 15 foot cord connected to the control box.

This hand held impulse sealer has upper and lower heated seal bars to seal a wide variety of materials including polyethylene, polypropylene, foils and laminates.

- Seal Length: 11", 15", 25"
- Seal Width: 1/8"
- Biactive sealing (both jaws heated)
- Adjustable seal timer for sealing a variety of materials
- Handset mounted LED light to indicate sealer is ready or sealing
- Spring jaw closure and handle mounted cycle button for convenient operation
- 15 foot long power cord
- Electrical requirement: 115V
- Machine Weight: 3.3 lbs (11"), 3.8 lbs (15"), 4.7 lbs (25")