

 **First** in Quality. Built to **Last**.

# L-SEALERS

## PROFESSIONAL SERIES

### DURABILITY THAT CAN'T BE MATCHED

EASTEY's Professional Series L-Sealers provide top of the line features and the most robust L-Sealer design on the market today. Expertly welded from 1/4" cold rolled steel, EASTEY Professional L-Sealers will withstand even the most abusive real world sealing applications. As a measure of strength, EASTEY L-Sealers weigh nearly twice as much as competitive models.

### PROVEN RELIABILITY FOR YOUR NEEDS

Easteey L-Sealers are designed and built to give you all the performance features needed for positive sealing a wide variety of films including polyolefin, polyethylene, and PVC. Cast seal arms, stainless steel film clamps, and heavy-duty magnet clamping are just some of the features that provide the durability you have come to rely on from EASTEY. See for yourself why EASTEY has been a leader in the shrink packaging industry for over 25 years.

### STANDARD FEATURES

- Designed to seal most polyolefin, polyethylene, and PVC shrink films
- All-welded main frame from 1/4" cold rolled steel
- Built-in drawer for tools or spare parts
- Seal head casting equipped with head return cylinder
- Stainless steel film clamps hold film in place while sealing
- Utilizes durable and low maintenance hot knife seal system
- Hot knife seal systems available with mushroom (standard), pancake, or arrow inserts

## EVERLASTING SEMI-AUTOMATIC L-SEALING

EASTEY Professional Series L-Sealers are the ultimate workhorse for your most abusive sealing applications.

### STANDARD FEATURES (cont.)


- Dual locking magnet clamps apply even pressure across sealbar
- Adjustable dwell time for better seal control
- Solid state temperature control adjustable for a variety of films\*
- Adjustable product tray accommodates wide variety of product sizes
- Takeaway conveyor can be raised or lowered to center-seal product
- Automatic takeaway conveyor
- Heavy duty film cradle allows for easy changeovers and adjustments
- Adjustable pin perforator provides air evacuation
- Side seal size from 20" - 50"; front seal size from 16" - 100"
- Maximum film width up to 44"
- Maximum film roll OD up to 12"; 10" with power unwind
- Custom two-part epoxy finish resists scratching
- Heavy duty casters for transportation within plant
- Available in 110v, 220v, or optional 480v
- Easy to use design requires minimal training and maintenance
- Made in the USA

### OPTIONS


- Additional Pin Perforator Wheel
- Additional 2" Seal Bar Length Extension - front or side
- Variable Speed Takeaway Conveyors
- Lowered Conveyor - additional 2" to allow for 4" additional product height
- Conveyor Assist - for transferring heavy products
- Product Tray - Custom size, stainless finish, UHMW, or gravity roller
- Product Assist with photoeye
- UL approved electronics and control box
- Left hand machines available
- Custom sizes and configurations available upon request

*\*Ask Us About Custom Equipment*

STANDARD FEATURES

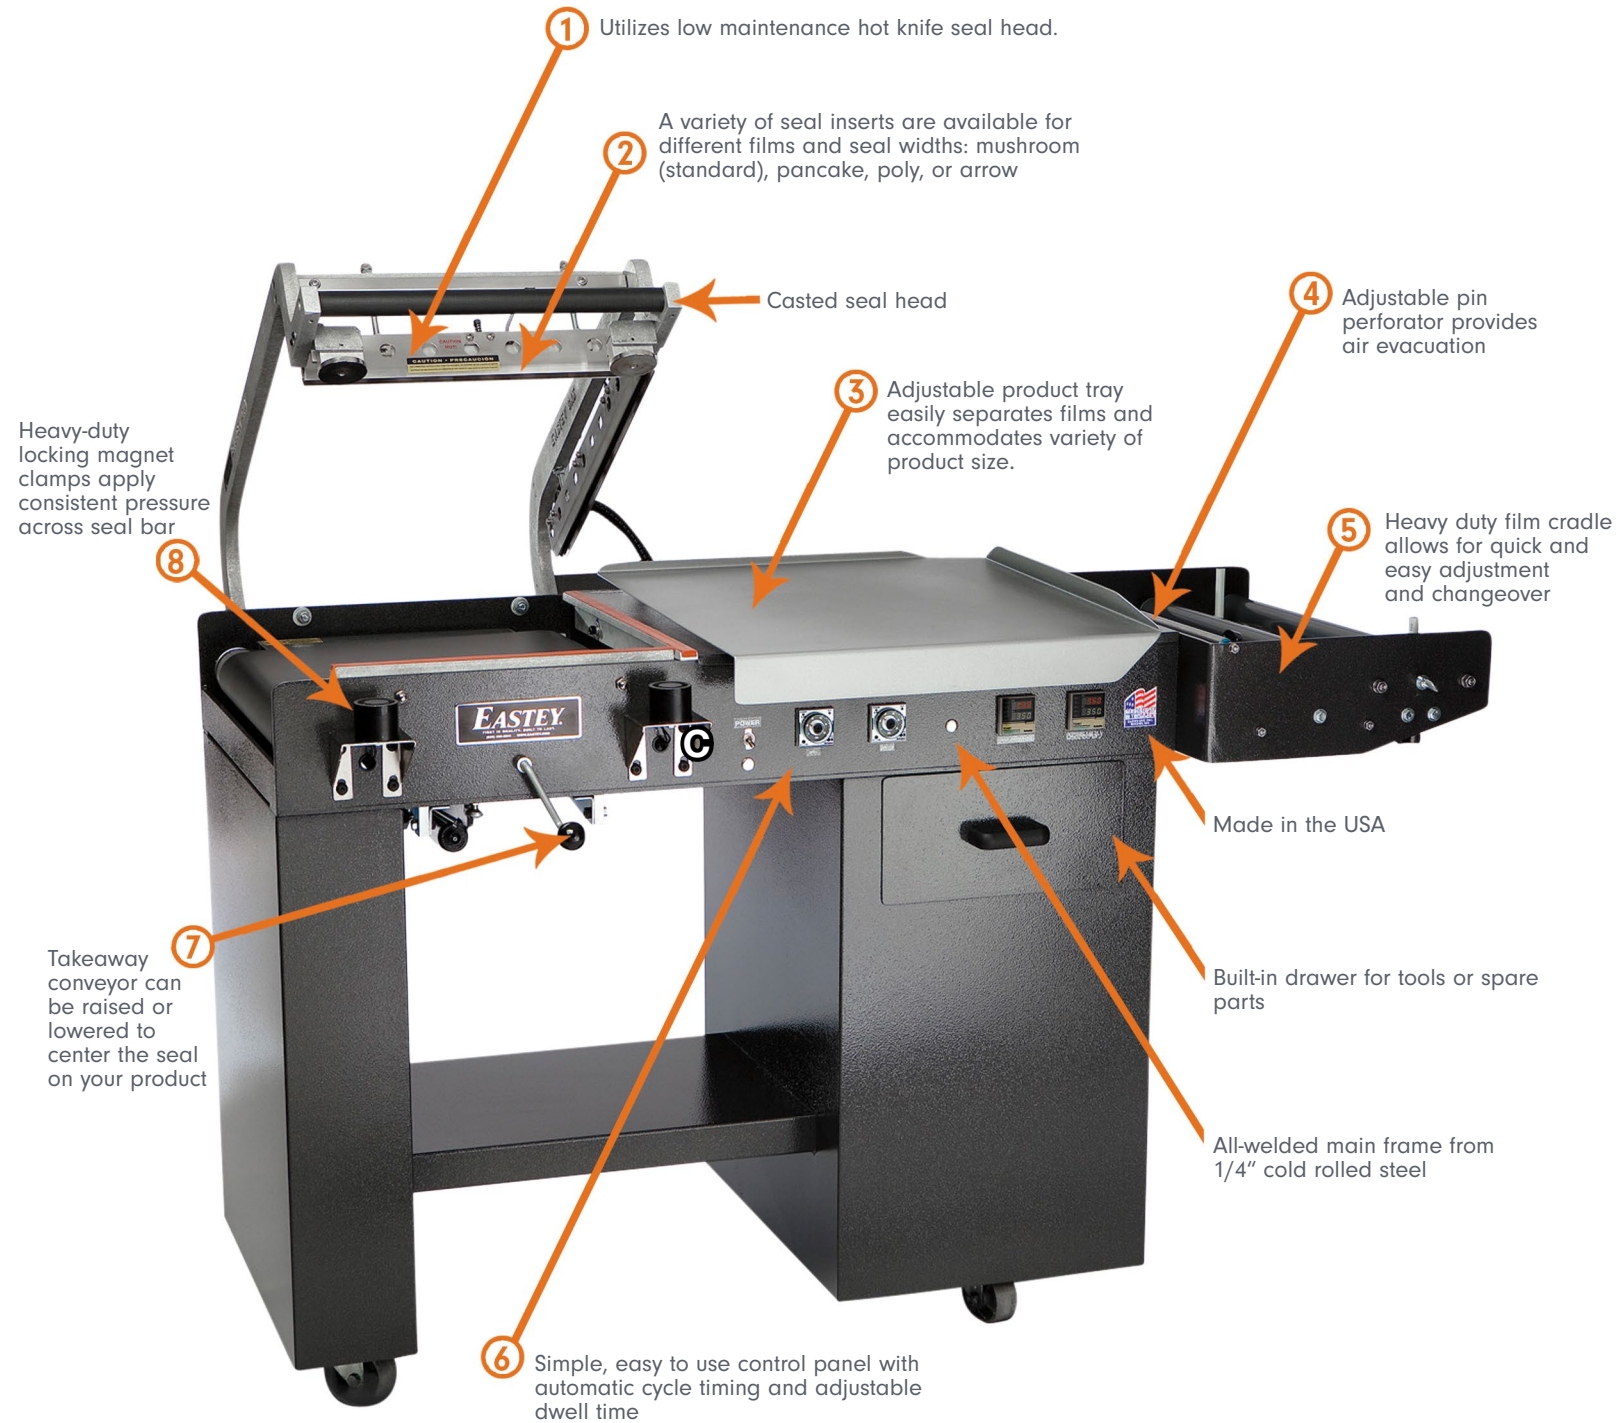

OPTIONAL ACCESSORIES

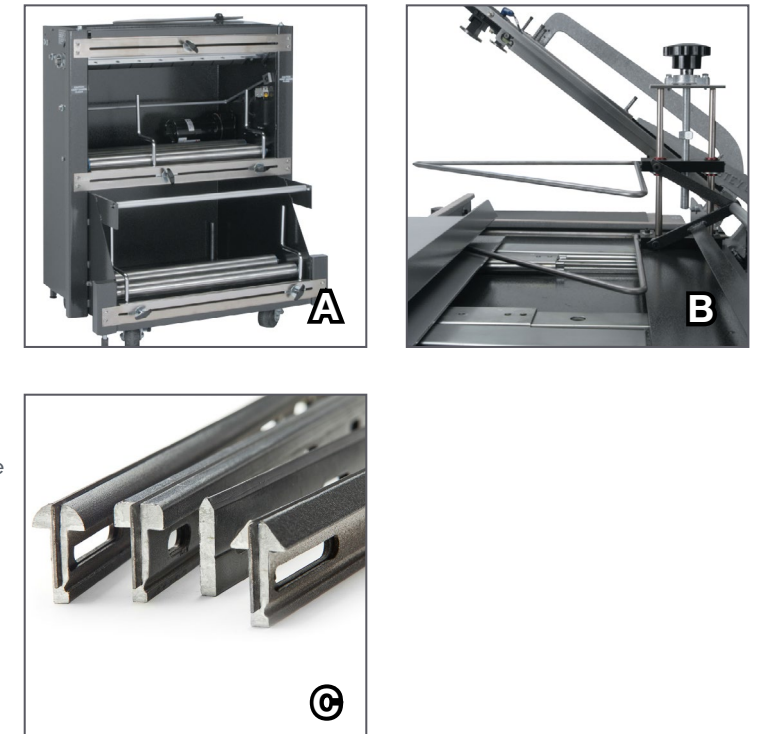

- A Power film unwind**  
Allows free feeding of film increasing operator efficiency.
- B Film Inverter**  
Inverting head allows the film to come off the back of machine. This pre-opens the film and minimizes operator effort which in turn increases output.
- C Hot Knife Inserts**  
Hot knife seal inserts available for different films and seal widths: mushroom (standard), pancake, poly, or arrow.

- Additional Pin Perforator Wheel
- Additional 2" Seal Bar Length Extension - front or side
- Variable Speed Takeaway Conveyors
- Lowered Conveyor - additional 2" to allow for 4" additional product height
- Conveyor Assist - for transferring heavy products
- Product Tray - Custom size, stainless finish, UHMW, or gravity roller
- Product Assist with photoeye
- UL approved electronics and control box
- Left hand machines available
- Custom sizes and configurations available upon request

L-SEALERS  
PROFESSIONAL SERIES

# L-SEALERS PROFESSIONAL SERIES

MODEL NUMBER	SEAL DIMENSIONS		MACHINE DIMENSIONS			STANDARD POWER			WEIGHT	SHP WT.
	FRONT	SIDE	WIDTH	HEIGHT	LENGTH	VOLTS	AMPS	PHASE		
EM2016TK	16" 41 cm	20" 51 cm	34" 86 cm	44" 112 cm	63" 160 cm	220/110	10/20	1	600 lbs 272 kg	700 lbs 317 kg
EM2028TK	28" 71 cm	20" 51 cm	34" 86 cm	44" 112 cm	84" 213 cm	220/110	10/20	1	700 lbs 317 kg	800 lbs 362 kg
EM2040TK	40" 102 cm	20" 51 cm	34" 86 cm	44" 112 cm	106" 269 cm	220	15	1	800 lbs 362 kg	900 lbs 408 kg
EM2050TK	50" 127 cm	20" 51 cm	34" 86 cm	44" 112 cm	126" 320 cm	220	20	1	900 lbs 408 kg	1000 lbs 453 kg
EM2070TK	70" 178 cm	20" 51 cm	34" 86.36	44" 112 cm	167" 424 cm	220	25	1	1300 lbs 589 kg	1400 lbs 635 kg
EM2080TK	80" 203 cm	20" 50 cm	34" 86 cm	44" 112 cm	187" 474 cm	220	20	1	1500 lbs 680 kg	1600 lbs 725 kg
EM20100TK	100" 254 cm	20" 50 cm	34" 86 cm	44" 112 cm	227" 577 cm	220	20	1	1900 lbs 861 kg	2000 lbs 907 kg
EM3040TK	40" 101.60	30" 76.20	43" 109 cm	44" 112 cm	106" 269 cm	220	20	1	1200 lbs 544 kg	1300 lbs 591 kg
EM3050TTK	50" 127 cm	30" 76 cm	43" 109 cm	44" 112 cm	126" 320.04	220	20	1	1300 lbs 591 kg	1400 lbs 637 kg
EM3070TK	70" 177 cm	30" 76 cm	43" 109 cm	44" 112 cm	167" 424 cm	220	25	1	1600 lbs 728 kg	1700 lbs 774 kg
EM3080TK	80" 203 cm	30" 76 cm	43" 109 cm	44" 112 cm	187" 474 cm	220	25	1	1800 lbs 819 kg	1900 lbs 861 kg
EM30100TK	100" 254 cm	30" 76 cm	43" 109 cm	44" 112 cm	227" 577 cm	220	25	1	2100 lbs 956 kg	2200 lbs 997 kg
EM4040TK*	40" 101 cm	40" 101 cm	53" 135 cm	44" 112 cm	106" 269 cm	220	20	1	1700 lbs 774 kg	1800 lbs 819 kg
EM4050TK*	50" 127 cm	40" 101 cm	53" 135 cm	44" 112 cm	126" 320 cm	220	20	1	1900 lbs 861 kg	2000 lbs 907 kg
EM4070TK*	70" 177 cm	40" 101 cm	53" 135 cm	44" 112 cm	167" 424 cm	220	25	1	2100 lbs 956 kg	2200 lbs 997 kg
EM4080TK*	80" 203 cm	40" 101 cm	53" 135 cm	44" 112 cm	187" 474 cm	220	25	1	2300 lbs 1043 kg	2400 lbs 1092 kg
EM40100TK*	100" 254 cm	40" 101 cm	53" 135 cm	44" 112 cm	227" 577 cm	220	25	1	2600 lbs 1179 kg	2700 lbs 1229 kg
EM5050TK*	50" 127 cm	50" 127 cm	63" 160 cm	44" 112 cm	126" 320 cm	220	20	1	1900 lbs 861 kg	2000 lbs 907 kg
EM5070TK*	70" 177 cm	50" 127 cm	63" 160 cm	44" 112 cm	167" 424 cm	220	25	1	2100 lbs 956 kg	2200 lbs 997 kg
EM5080TK*	80" 203 cm	50" 127 cm	63" 160 cm	44" 112 cm	187" 474 cm	220	25	1	2300 lbs 1043 kg	2400 lbs 1092 kg
EM50100TK*	100 254.00	50" 127 cm	63" 160 cm	44" 112 cm	227" 577 cm	220	25	1	2600 lbs 1179 kg	2700 lbs 1229 kg

\* Powered film unwind included



7041 Boone Avenue North, Brooklyn Park, MN 55428  
 (763) 428-4846 1 (800) 835-9344  
 www.eastey.com info@eastey.com



ENGAGE technologies corporation

020823 Rev B