
StrzPzek

High Speed Paper/Film Tape Banding Machine



OB-360N

OB-360N

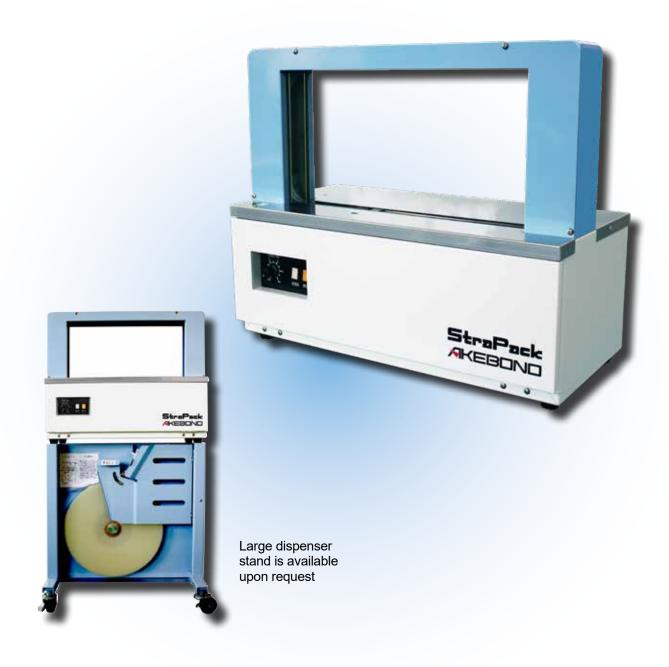

High Speed Paper/Film Tape Banding Machine

Introducing the new OB-360N. An upgrade from the OB-360, it's more efficient, more versatile, and easier to operate and maintain.

■ High Speed

Up to 30 cycles per minute. Soft or elastic bundles can be banded without sacrificing the speed.

■ Versatile

- -Applies banding to packages as small as 30mm (1-1/8") wide x 10mm (3/8") high up to 420mm (16-1/2") wide x 210mm (8-1/4") high.
- -Either paper or film tape can be used.
- -Larger arch size is available upon request.

■ Stronger Tension

Tension is easily adjustable, with a volume dial, from 5N to 60N (approx. 1 - 13.5lbsf) to accommodate various applications.

■ Better Sealing


Improved sealing/heater design helps achieve an even melting and seamless seal eliminating curled, folded or peeling tape edges.

■ Easier Maintenance

The added guide to the tape shooter attachment takes the guesswork out of the reassembly. Along with the built-in Aluminum Sealing Frame, maintenance will be a breeze.

■ Friendly Operation

- A cycle can be activated by simply placing a bundle on the table, pressing the Start button or stepping on the foot pedal.
- The Start button has been moved to the table top for easy operation.
- The machine will not operate accidentally without a package on the table.
- In case of feeding issues, the reset function allows the machine to quickly return to its starting position.

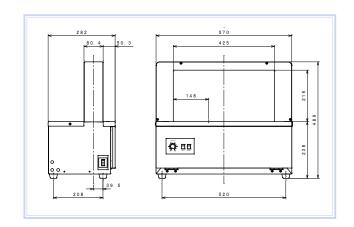

■ Standard Specifications

Arch Size		W425 x H220	W16-3/4 X H 8-5/8 in.
Dimension	Width	570 mm	22-1/2 in.
	Height	489 mm	19-1/4 in.
	Depth	282 mm	11-1/8 in.
	Weight	25.5 kg	56-1/4 lbs.
Table Height		238 mm	9-1/4 in.
Min. Package Size		W 30 X H 10 mm	W 1-1/8 X H 3/8 in.
Max. Package Size		W420 X H 210 mm	W16-1/2 X H 8-1/4 in.
Таре		W 30 mm x 190m 80g (paper)	W 1-1/8 in x 623ft 28 ounce (paper)
		W 30 mm x 200-370m 60-110µm (film)	W 1-1/8 in x 656-1214ft 60-110µm (film)
Strap Tension	60µm Film	5-30N (0.5-3 kgf)	1 - 6.6 lbsf
	110µm Film	5-60N (0.5-6.1kgf)	1 - 13.5 lbsf
	80g (28oz.)Paper	5-45N (0.5-4.6kgf)	1 - 10.1 lbsf
Power Supply		100 V 1 Phase 50 / 60 Hz 250 W	

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

© 2017 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

8-16-6 Ginza, Chuo-ku, Tokyo, 104-0061, JAPAN Phone 81-3-6278-1806 Fax. 81-3-6278-1807 (URL) http://www.strapack.com (E-mail) info@strapack.com STRAPACK INC.

33508 Central Avenue, Union City, CA 94587-2097 U.S.A. Phone 1-510-475-6000 Fax. 1-510-475-6090

STRAPACK, N.V./S.A.

Uilenbaan 200, B-2160 Wommelgem, BELGIUM Phone 32-(0)3-355-1520 Fax. 32-(0)3-355-1521